




**Vanguard**

COMPAGNIA ITALIANA LUBRIFICANTI

**MOLYguard**

# STEEL PLANT

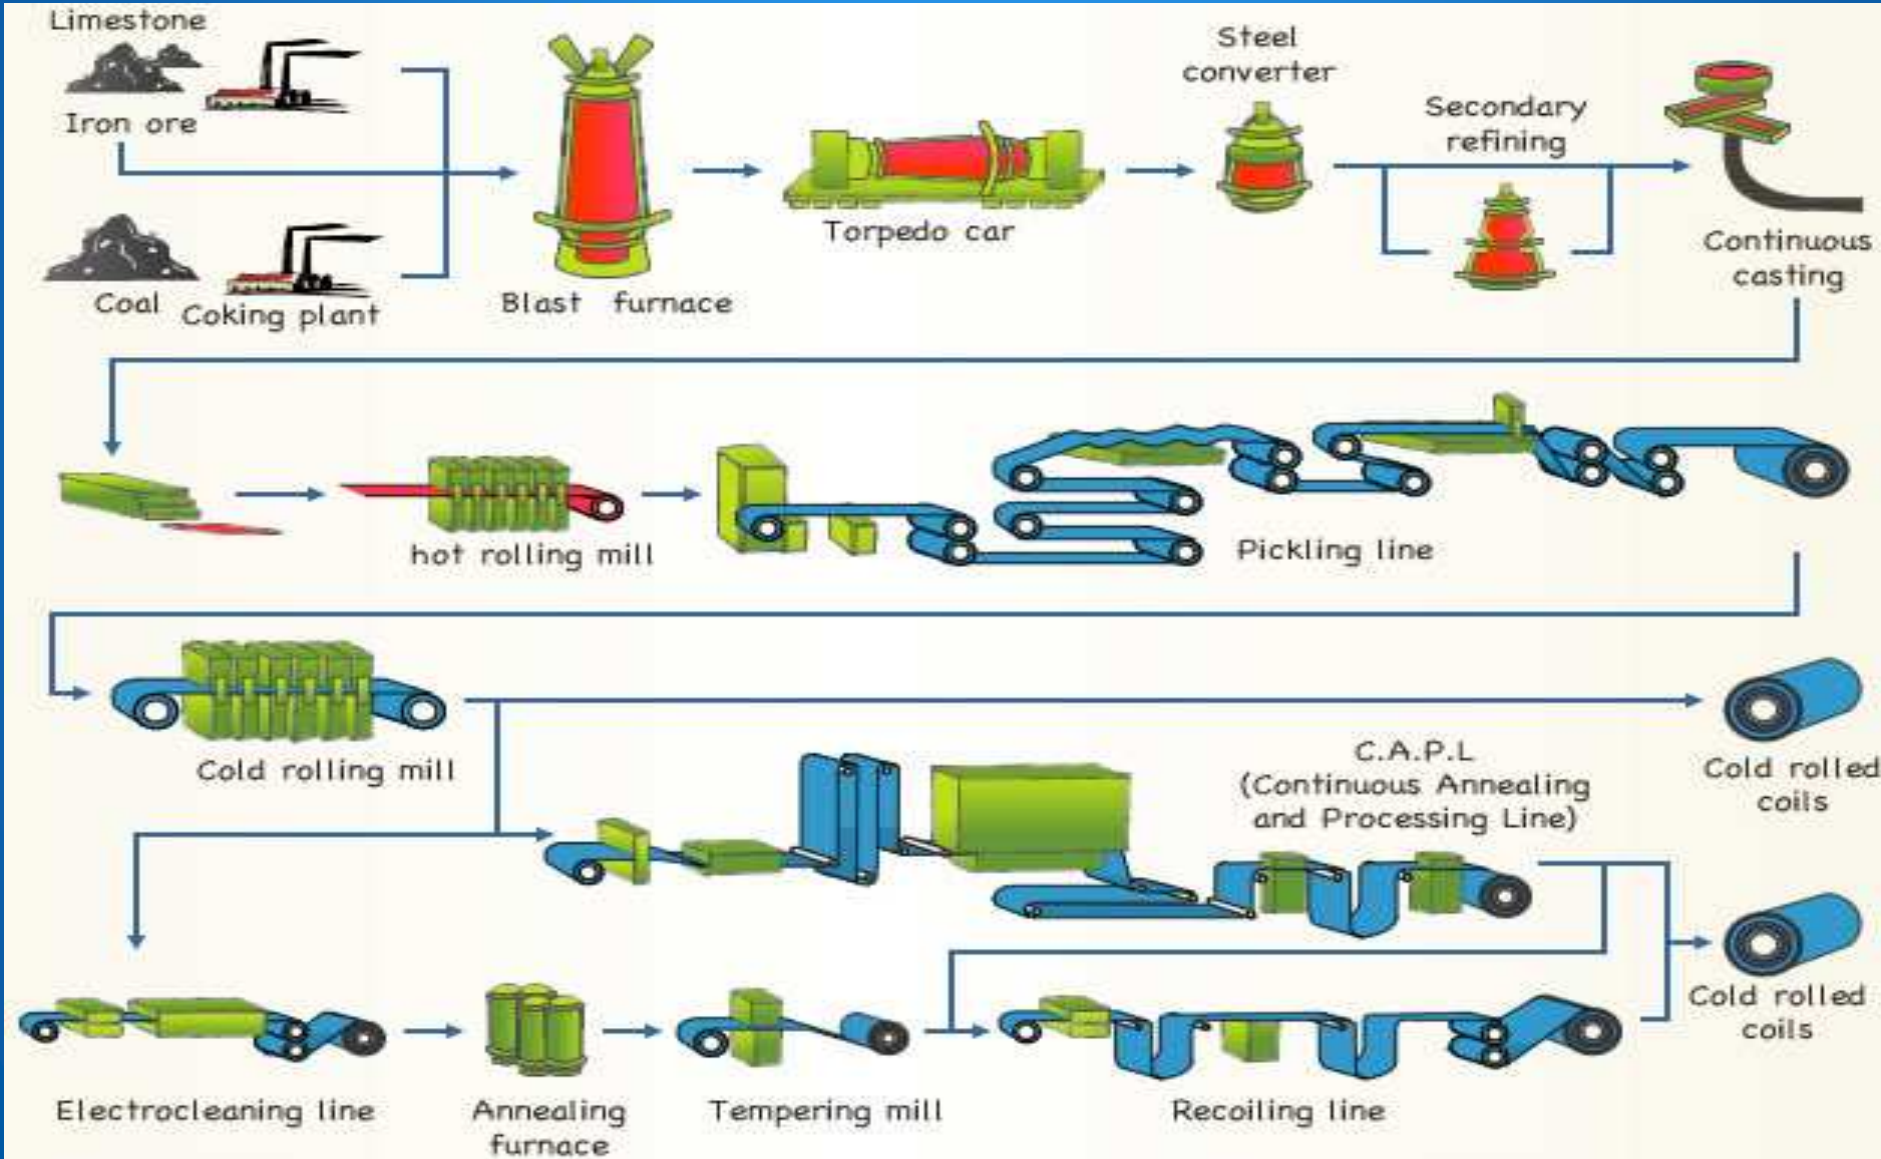

# SINTERING/PALLET CAR PLANT



MOLYguard GS ROLLER DR 1/2  
Re-lubrication wheel bearing every  
SIX months without any residual

Less maintenance cost


JSW in one year no one bearing  
problem

MOLYguard GS ROLLER DR 1/2  
Special soap grease with calcium  
Complex sulphonated base for sliding truck

**JSW –DOLVI- India**  
**Re-lubrication period every 60 minutes**  
**Against our competitor every 12 minutes**




# BLAST FURNACE

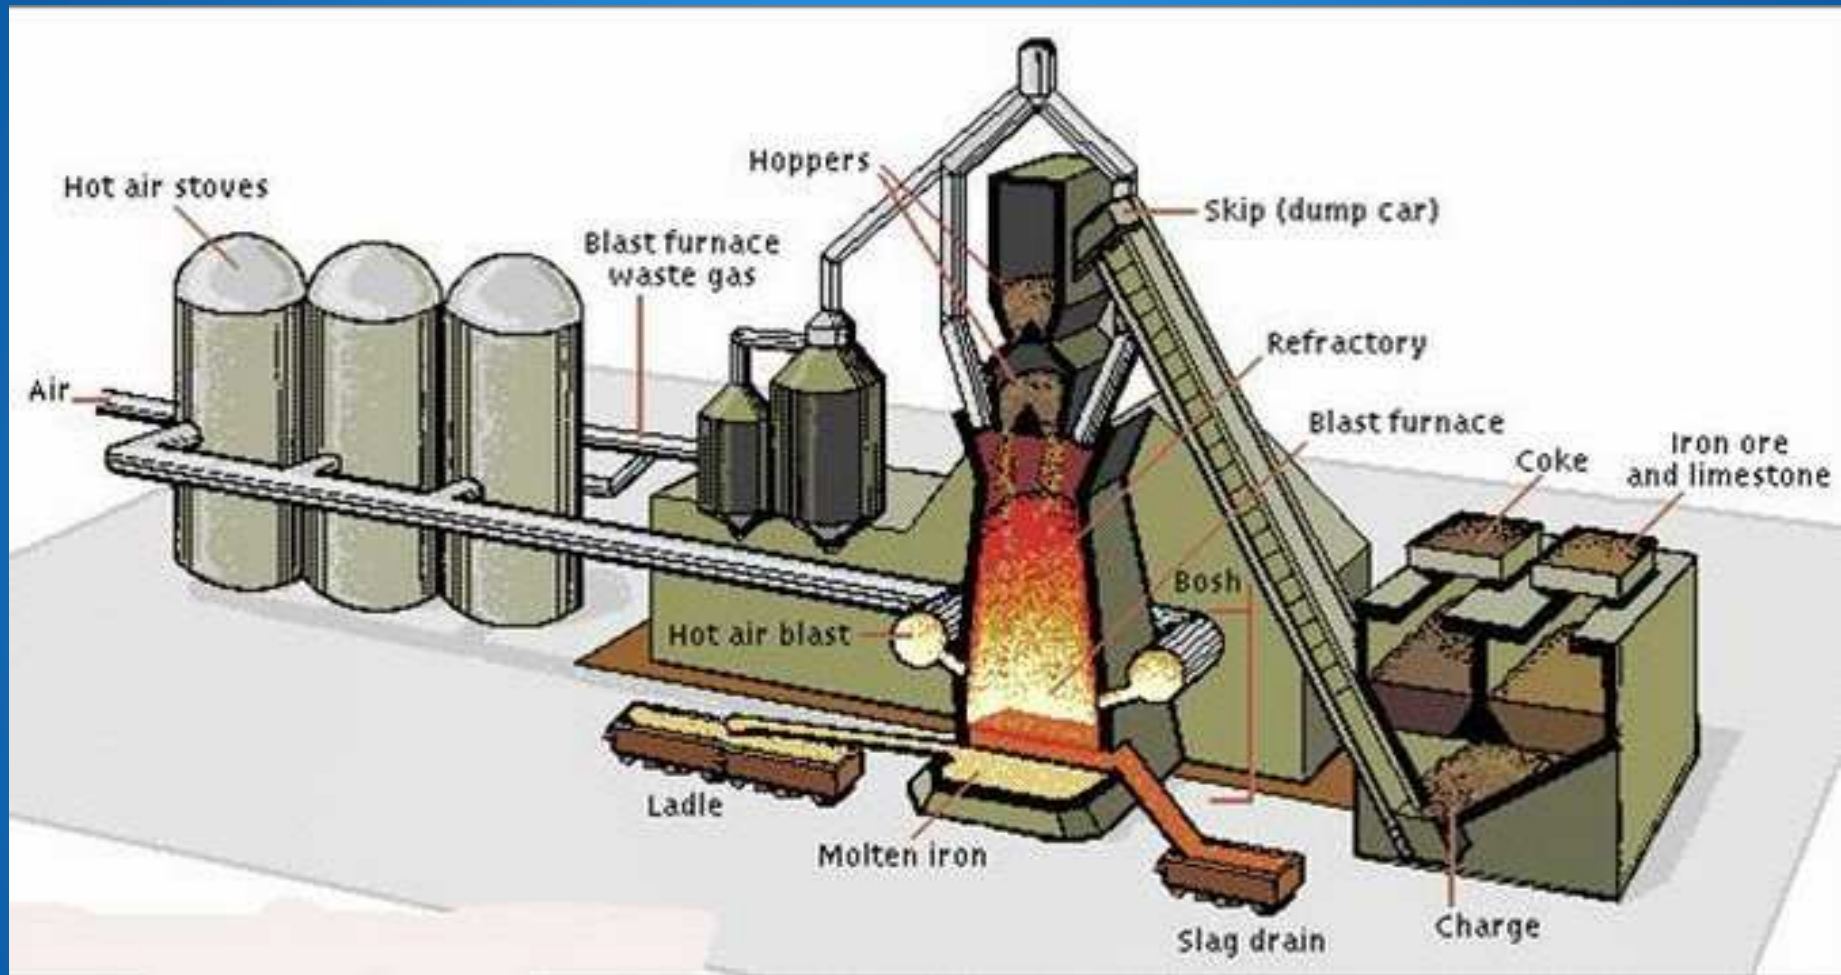



Roots Blower MOLYguard GEAR SINT EP for gear box with temperature over then 140°C  
Charging System MOLYguard GS ROLLER DR 1/2 for car  
Torpedo Ladle MOLYguard GS ROLLER DR 1/2 for wheel rolling bearings

# STEEL PRODUCTION

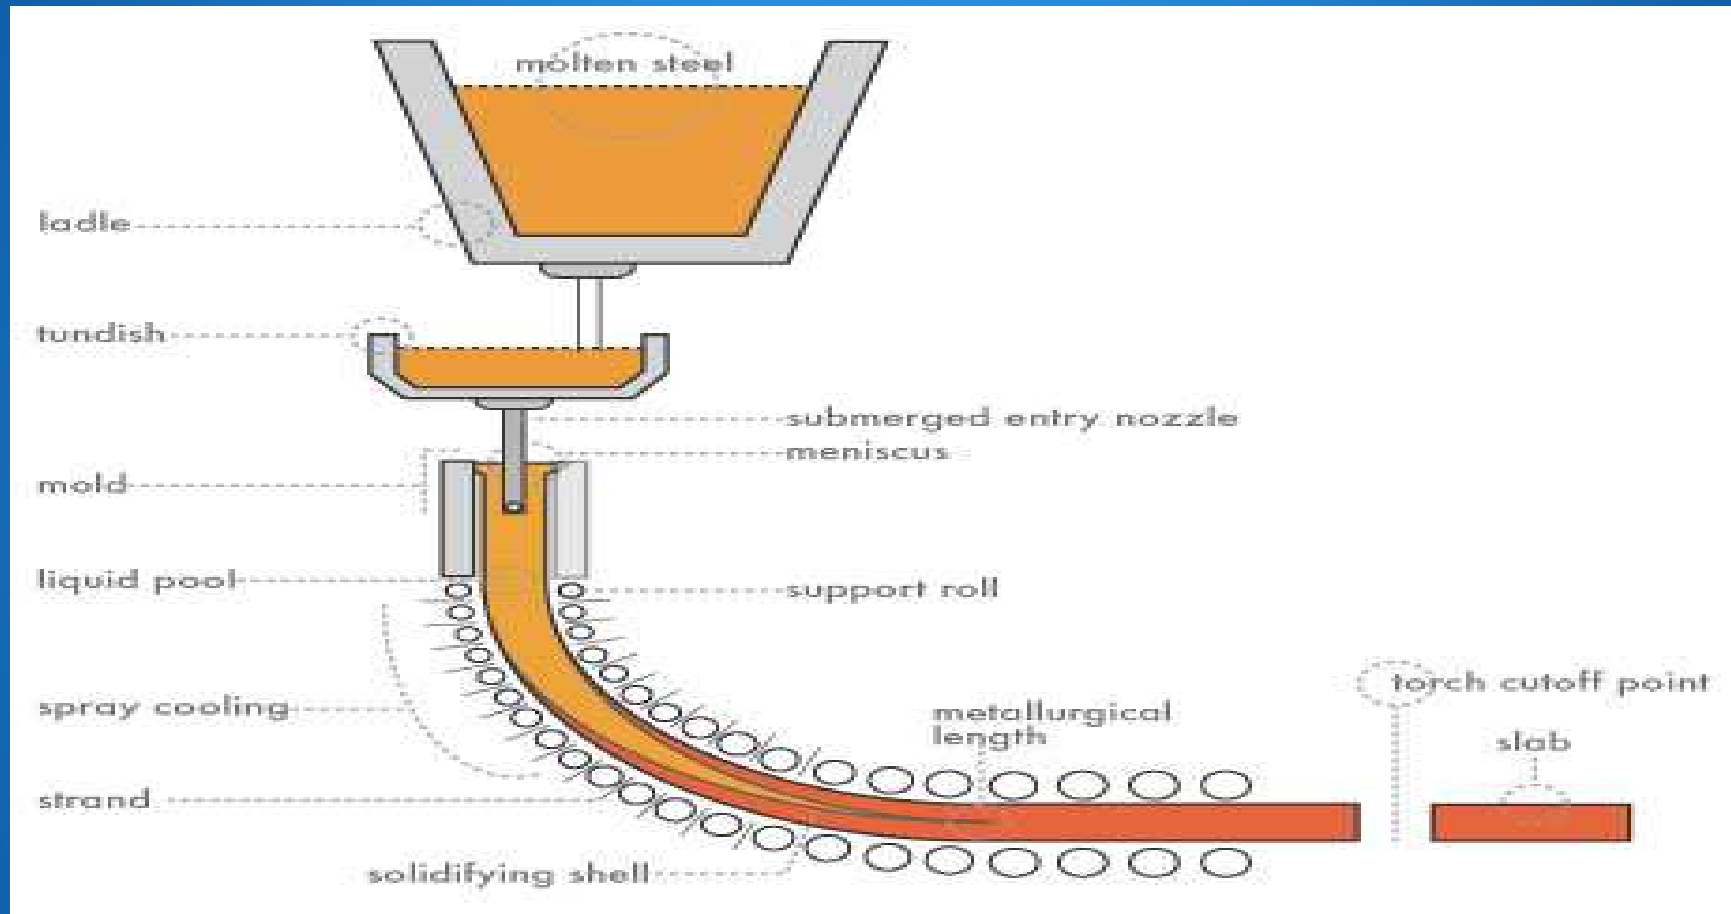

Ladle - MOLYguard COMPOUND RA 40 for plain bearings  
MOLYguard GS ROLLER DR 1/2 for roller bearings  
MOLYguard XR 120 for open gears drives

# CONTINUE CASTING

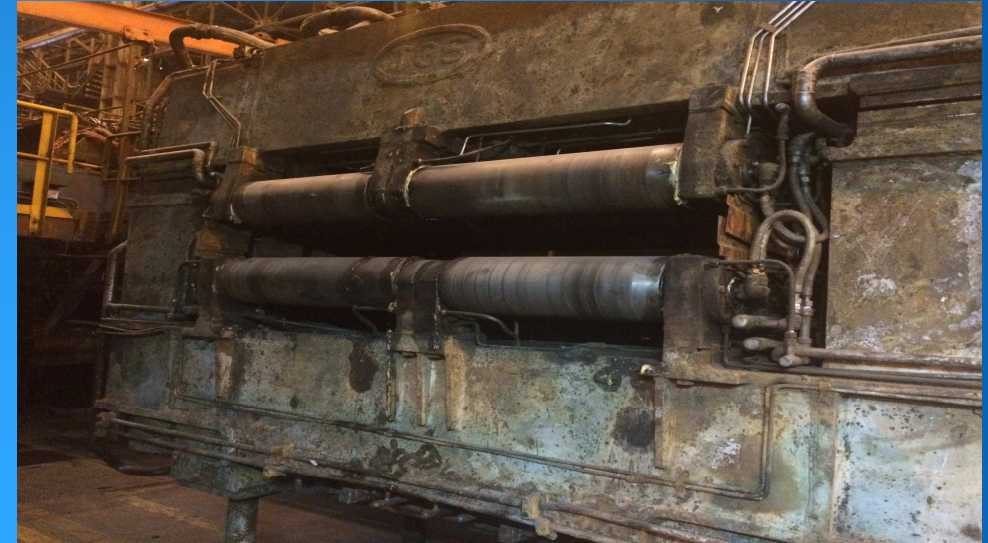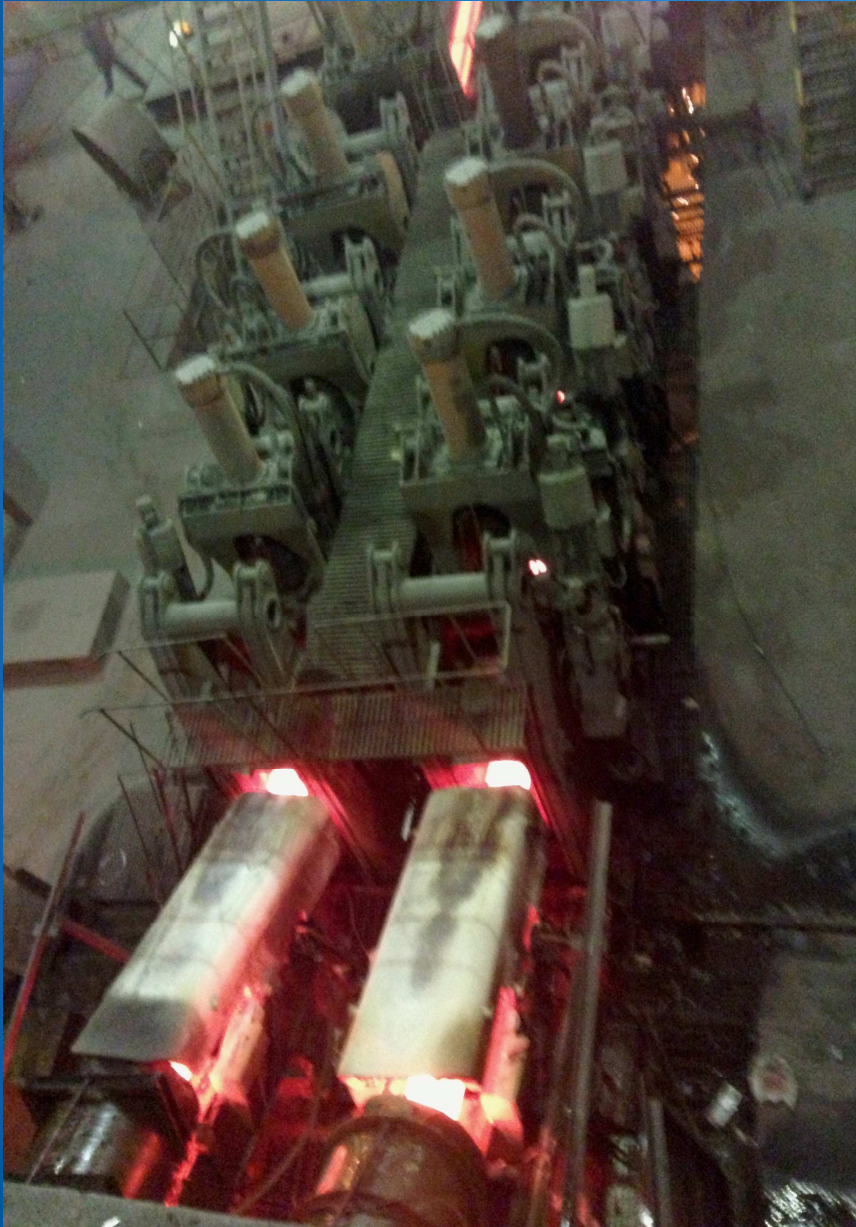

MOLYguard GS ROLLER DR 1/2

Wet Segment rolling bearings  
Extractor rolling bearings



# HOT ROLLING MILL



MOLYguard GS ROLLER DR 1/2  
calcium complex sulphonated grease for  
rolling bearing with high load and water  
presence

# COLD ROLLING MILL



MOLYguard GS ROLLER DR 1/2  
Grease for rolling bearing  
Perfect sealing properties

Test made in CSN \_ Brasil  
Re-lubrication period every 120  
hours

Our copetitor Re-lubrication every  
40 hours





# GALVANISATION



MOLYguard GS ROLLER DR 1/2 for pre-heating section oven rollers rolling bearings

# Vanguard

COMPAGNIA ITALIANA LUBRIFICANTI



MOLYguard

COMPAGNIA ITALIANA LUBRIFICANTI SpA

20145 MILANO - Largo Domodossola, 7 - Tel. 02 34553.1 Fax. 02 3490417  
e-mail: [cil@compagniaitalianalubrificanti.it](mailto:cil@compagniaitalianalubrificanti.it) - [www.compagniaitalianalubrificanti.com](http://www.compagniaitalianalubrificanti.com)